



TS 300

Continuous duty Wet & Dry industrial vacuum cleaner

Suction unit

The suction is provided by a suction unit of the side channel blower type, with direct coupling between the fan and the motor shaft and no transmission system. It is thus completely maintenance free, fit for round-the-clock 24 hours duty, very silent and provides outstanding suction performances; a vacuum gauge enables constant checking of the suction performance, and detecting possible clogging of the filter. A diffuser filter reduces the speed and noise of the air on the exhaust outlet.

Filter unit

The filter is placed and protected inside the steel filter chamber; ; the polyester star filter provides a filter surface of 20,000 cm², and high filtration efficiency (class L, 3 micron). A manual filter shaker enables the user to clean the filter efficiently, by a vertical shaking movement, so as to detach most of the dust and maintain the filter clean, in order to increase its life and maintain the suction performance of the machine. The aluminium die-cast suction inlet (Ø80 mm. diameter), placed below the filter, makes it possible to vacuum at the same time dust, solid and liquid material (the latter only within the capacity of the container), with no need to change or take out the filter.

Collection unit

The vacuumed material is placed inside a drop-down bin mounted on wheels (100 litres capacity), which makes it possible to dispose easily and safely of the sucked material, if need be collecting it directly into a plastic bag.

The vacuum is mounted on a sturdy steel chassis with two pivoting wheels, one of which with brakes; all metal parts of the vacuum are epoxy painted.

規格 Technical data sheet

MODEL - TS 300		
電壓(三相)	Volts HZ	220-275/ 380-480 60
馬達出力	KW HP	2.55 3.4
最大靜壓*	mmAq	3,000
最大額定靜壓*	mmAq	2,140
最大風量**	M3/h	375
濾網面積	cm2	20,000
濾網材質		Polyester 聚酯纖維
濾網效率	Cat/ Micron	L 級 > 3um 適用
集塵桶容量	Lt.	100
吸入口	Ø	80
噪音值	dB(A)	76
馬達防護等級	IP	55
尺寸	cm.	62 x 110
高度	cm.	150
重量	kg	100
標準附件		Ø50軟管組

* Measured with fully closed suction inlet

** Measured with fully open suction inlet



*濾網型式




*標準配件

Il costruttore si riserva il diritto di modificare dati e caratteristiche indicate senza obbligo di preavviso.

The manufacturer reserves the right to change technical data without notice

選配Options

Cod	Description
M	Filter for fine dust - class M 一般濾網，等級M 適用，>1um
H	Absolute filter (BIA certified) with efficiency 99,995% particle size 0,18 µm standard EN 1822 多加裝HEPA(高效率濾網，BIA認證)，在粉塵為0.18um時有99.995%的過濾效果(依EN 1822標準)
PTFE	PTFE coated filter class M 鐵氟龍塗層濾網，等級M 適用，>1um
ANT	Antistatic filter 抗靜電濾網
X	Stainless steel collection tank 集塵筒 改不銹鋼材質
XX	Stainless steel tank and filter chamber 集塵筒與過濾桶 改不銹鋼材質
MT	Earth grounding 接地
PN	Reverse alternated air pulse cleaning 手搖式集塵改自動脈衝型

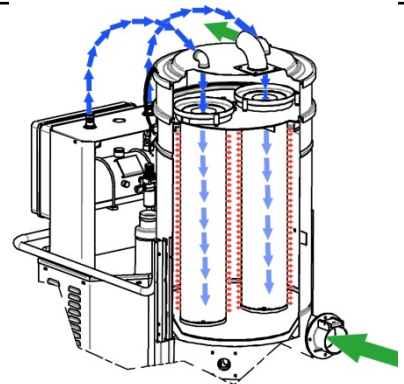

*手搖除塵裝置改自動脈衝型


TS 300-400 550 SE-750

INOX PTFE



TS 300	TS 400	TS 550 SE	TS 750
400	400	400	400
2,2	4	4,3	5,5
3000	3.200	5.100	3.000
300	450	320	550
20.000	30.000	30.000	30.000
L	L	L	L
80	80	80	80
100	100	100	100
72	69	76	74
62 x 110 x 150 h	62 x 110 x 150 h	62 x 110 x 150 h	62 x 110 x 150 h

TS INDUSTRIAL | TS HD

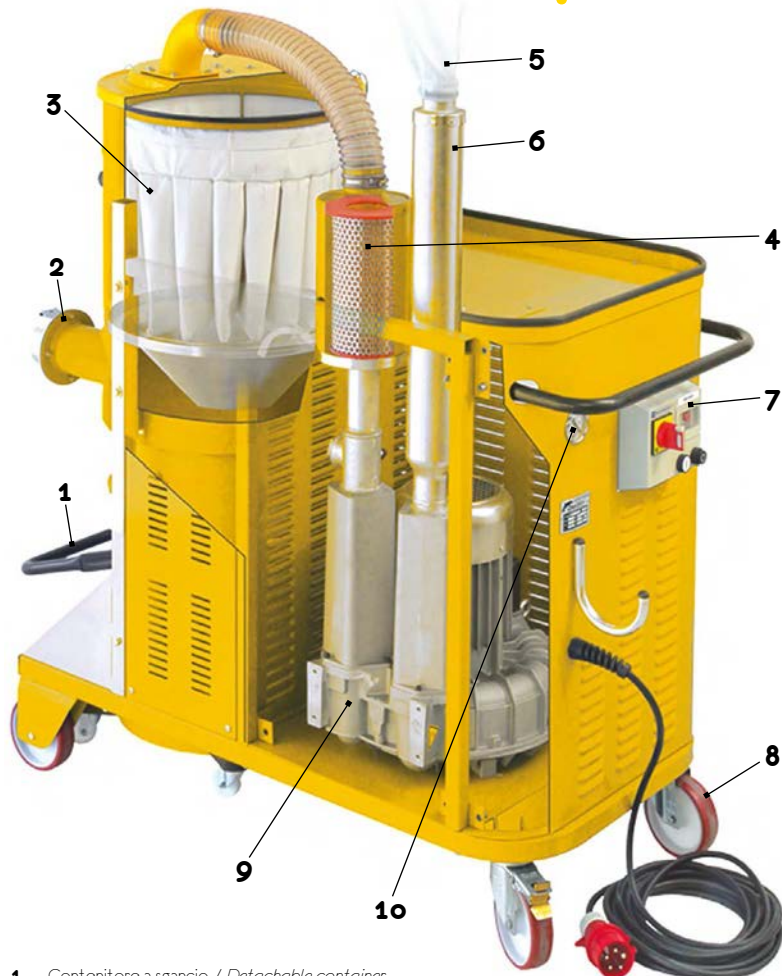

1. Contenitore a sgancio / Detachable container
2. Ingresso tangenziale più ciclone di abbattimento polveri / Tangential suction inlet plus internal cyclone
3. Filtro di ampia superficie / Wide pocket filter
4. Filtro di sicurezza opzionale / Optional safety cartridge filter
5. Filtro diffusore / Diffuser filter
6. Silenziatore / Silencer
7. Pannello elettrico di accensione e spegnimento / Electrical on-off switch
8. Ruote robuste industriali / Industrial heavy duty wheels
9. Soffiante a canale laterale / Quality side channel blowers
10. Vacuometro per rilevamento efficienza filtro / Vacuum gauge to detect filter efficiency

Alcune caratteristiche sono opzionali per alcune macchine / Some features are optional for some machines

Principali settori applicativi / Main application fields



Opzioni / Options



Aspiratore industriale trifase per polveri - solidi - liquidi.

- Potente e maneggevole
- Motore idoneo a servizio continuativo 24h/7, esente da manutenzione
- Alta superficie ed efficienza di filtrazione
- Robusto, compatto e maneggevole
- Contenitore a sgancio
- Kit accessori Ø 50 compreso

Three phase industrial vacuums for solid - dust - liquids.

- Powerful and mobile
- Maintenance free motor, suitable for 24h/7 continuous duty
- High filtration surface and efficiency
- Sturdy, powerful and mobile
- Detachable collection bin
- Accessory kit Ø 50 included

Tensione / Voltage	Volt
Potenza / Power	KW
Depressione massima / Water lift max.	mm H ₂ O
Portata d'aria massima / Air flow max.	m ³ /h
Superficie filtrante / Filter surface	cm ²
Classe filtrazione / Filter efficiency class	CAT BIA
Diametro bocchettone / Suction inlet	mm
Capacità contenitore / Tank volume	Lt
Livello sonoro / Noise level	dB(A)
Dimensioni / Dimensions	cm