



TS 750

Industrial vacuum cleaner for dust, liquid and solid material

Suction unit

The suction is provided by a suction unit of the side channel blower type, with direct coupling between the fan and the motor shaft and no transmission system. It is thus completely maintenance free, fit for round-the-clock 24 hours duty, very silent and provides outstanding suction performances; a safety switch cuts off the motor in case of overheating. A safety cartridge filter, placed between the motor and the main filter, protects the motor from contact with dust in case of dust accidentally passing through the main filter; a vacuum indicator enables constant checking of the suction performance, and detecting possible clogging of the filter. A diffuser filter reduces the speed and noise of the air on the exhaust outlet.

Filter unit

The polyester star filter, placed and protected inside the steel filter chamber, provides a filter surface of 30,000 cm², and high filtration efficiency (class L, 3 micron). A manual filter shaker enables the user to clean the filter efficiently, by a vertical shaking movement, so as to detach most of the dust and maintain the filter clean, in order to increase its life and maintain the suction performance of the machine. The tangential aluminium die-cast suction inlet, placed below the filter, makes it possible to vacuum at the same time dust, solid and liquid material (the latter only within the capacity of the container), with no need to change or take out the filter. A cyclone welded inside the filter chamber conveys most of the dust directly in the container, and protects the filter from cutting or tearing.

Collection unit

The vacuumed material is placed inside a drop-down bin mounted on wheels (100 litres capacity), which makes it possible to dispose easily and safely of the sucked material, if need be collecting it directly into a plastic bag.

The vacuum is mounted on a sturdy steel chassis with two pivoting wheels, one of which with brakes; all metal parts of the vacuum are epoxy painted.

規格表 Technical data sheet


MODEL - TS 750		
電壓(三相)	Volts HZ	220-275/ 380-480 60
動力	KW Hp	6.3 8.4
最大額定靜壓	mm.H2O	1,987
最大風量	M3/h	625
濾網過濾面積 (star filter)	cm2	30,000
過濾效果	CAT BIA Micron	L > 3
集塵桶容量	Lt.	100
吸入口	Ø	80
噪音值	dB(A)	75
馬達防護等級	IP	55
尺寸	cm.	60 x 110
高度	cm.	150
重量	cm.	130

* Measured with fully closed suction inlet

** Measured with fully open suction inlet



*濾網型式

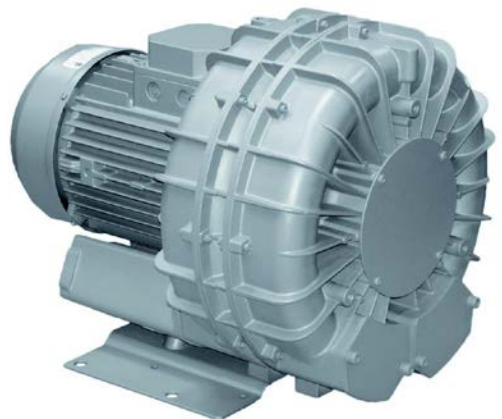


• 採用歐洲風機

Il costruttore si riserva il diritto di modificare dati e caratteristiche indicate senza obbligo di preavviso.

The manufacturer reserves the right to change technical data without notice

選購配件 Options

Cod	Description
M	Filter for fine dust - class M 一般濾網，等級M 適用，>1um
H	AbAbsolute filter (BIA certified) with efficiency 99,995% particle size 0,18 µm standard EN 1822 多加裝HEPA(高效率濾網，BIA認證)，在粉塵為0.18um時有99.995%的過濾效果(依EN 1822標準)
PTFE	PTFE coated filter class M, 鐵氟龍塗層濾網，等級M 適用，>1um
ANT	Antistatic filter 抗靜電濾網
ANT M	Antistatic filter class M 抗靜電濾網，等級M 適用，>1um
X	Stainless steel collection tank 集塵筒 改不銹鋼材質
XX	Stainless steel tank and filter chamber 集塵筒與過濾桶 改不銹鋼材質
MT	Earth grounding 接地
PN	Reverse alternated air pulse cleaning 手搖除塵裝置改自動脈沖型

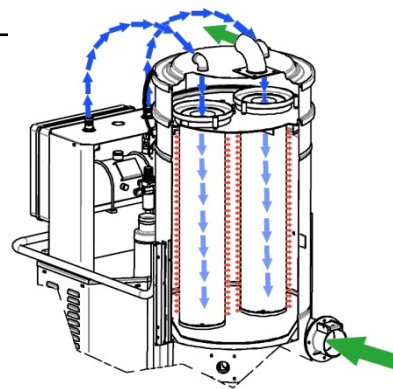

*手搖除塵裝置改自動脈沖型


TS 300-400 550 SE-750

INOX PTFE



TS 300	TS 400	TS 550 SE	TS 750
400	400	400	400
2,2	4	4,3	5,5
3000	3.200	5.100	3.000
300	450	320	550
20.000	30.000	30.000	30.000
L	L	L	L
80	80	80	80
100	100	100	100
72	69	76	74
62 x 110 x 150 h	62 x 110 x 150 h	62 x 110 x 150 h	62 x 110 x 150 h

TS INDUSTRIAL | TS HD

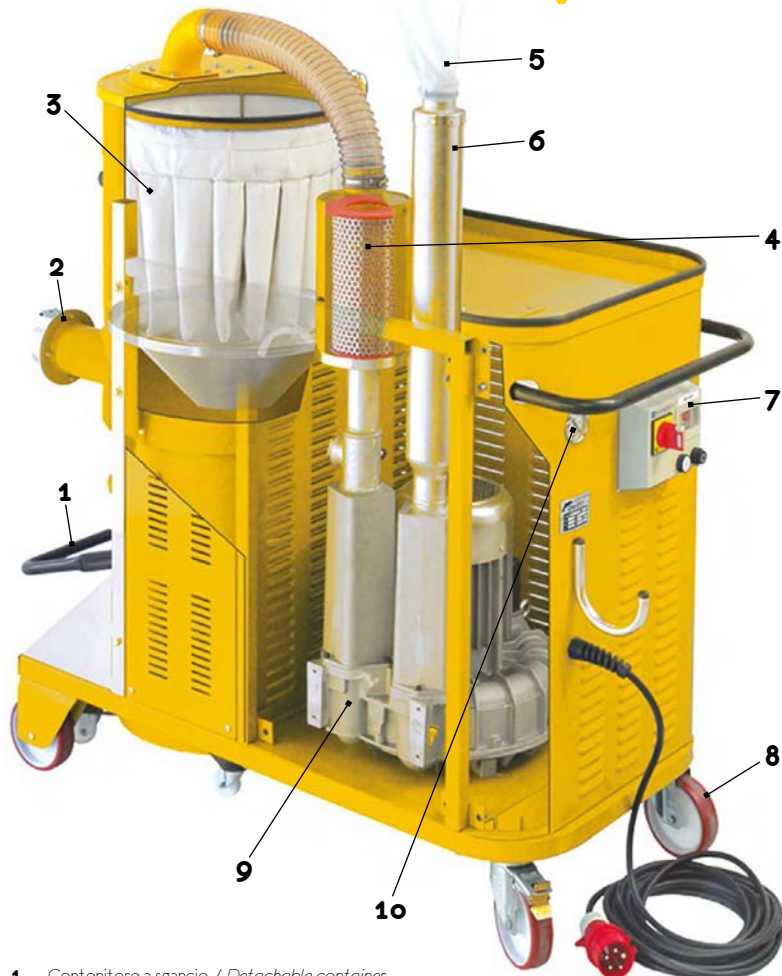

1. Contenitore a sgancio / Detachable container
2. Ingresso tangenziale più ciclone di abbattimento polveri / Tangential suction inlet plus internal cyclone
3. Filtro di ampia superficie / Wide pocket filter
4. Filtro di sicurezza opzionale / Optional safety cartridge filter
5. Filtro diffusore / Diffuser filter
6. Silenziatore / Silencer
7. Pannello elettrico di accensione e spegnimento / Electrical on-off switch
8. Ruote robuste industriali / Industrial heavy duty wheels
9. Soffiante a canale laterale / Quality side channel blowers
10. Vacuometro per rilevamento efficienza filtro / Vacuum gauge to detect filter efficiency

Alcune caratteristiche sono opzionali per alcune macchine / Some features are optional for some machines

Principali settori applicativi / Main application fields



Opzioni / Options



Aspiratore industriale trifase per polveri - solidi - liquidi.

- Potente e maneggevole
- Motore idoneo a servizio continuativo 24h/7, esente da manutenzione
- Alta superficie ed efficienza di filtrazione
- Robusto, compatto e maneggevole
- Contenitore a sgancio
- Kit accessori Ø 50 compreso

Three phase industrial vacuums for solid - dust - liquids.

- Powerful and mobile
- Maintenance free motor, suitable for 24h/7 continuous duty
- High filtration surface and efficiency
- Sturdy, powerful and mobile
- Detachable collection bin
- Accessory kit Ø 50 included

Tensione / Voltage	Volt
Potenza / Power	KW
Depressione massima / Water lift max.	mm H ₂ O
Portata d'aria massima / Air flow max.	m ³ /h
Superficie filtrante / Filter surface	cm ²
Classe filtrazione / Filter efficiency class	CAT BIA
Diametro bocchettone / Suction inlet	mm
Capacità contenitore / Tank volume	Lt
Livello sonoro / Noise level	dB(A)
Dimensioni / Dimensions	cm